

Coaxial Isolator 同轴式隔离器


HYG617F Series

1.Features 产品特点

UMTS, LTE Band

Wide Operation Temperature Range -40 ~ +70℃

2.Dimensions 尺寸展示

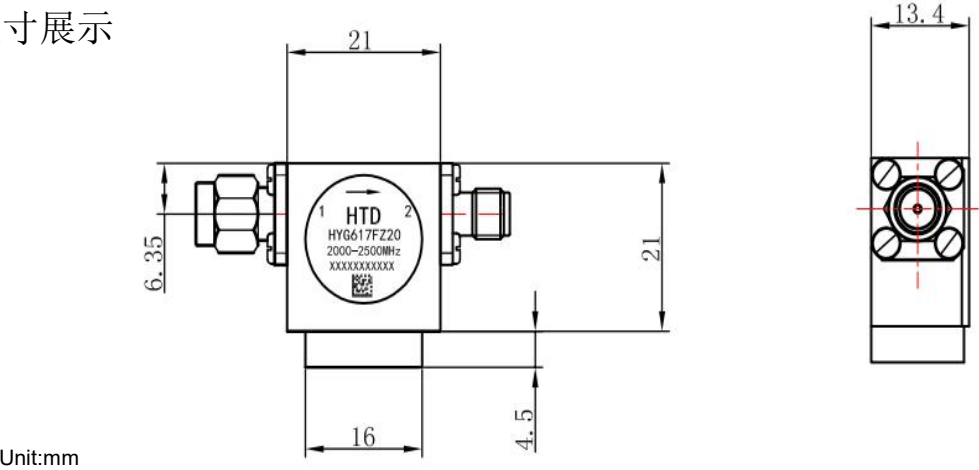

3.Specifications 规格参数

Part No.	Frequency (GHz)		Center Frequency	Bandwidth	Isolation	INS LOSS	VSWR	Power	IMD (@2X43dBm)
	F1	F2	(GHz)	(GHz)	(dB) MIN	(dB) MAX	MAX	(W)	(-dBc) MAX
HYG617FZ20(1500-1650MHz)	1.500	1.650	1.5750	0.150	20	0.35	1.25	100	
HYG617FZ20(1800-2300MHz)	1.800	2.300	2.050	0.500	19	0.4	1.25	100	
HYG617FZ20(2000-2500MHz)	2.000	2.500	2.2500	0.500	20	0.35	1.25	100	
HYG617FZ20(2.3-2.7GHz)	3.400	3.600	3.500	0.200	20	0.35	1.25	100	
HYG617FZ20(3.3-3.8GHZ)	3.300	3.800	3.5500	0.500	20	0.35	1.25	100	
HYG617FZ20(4.79-4.96GHZ)	4.790	4.960	4.875	0.170	22	0.3	1.2	100	